

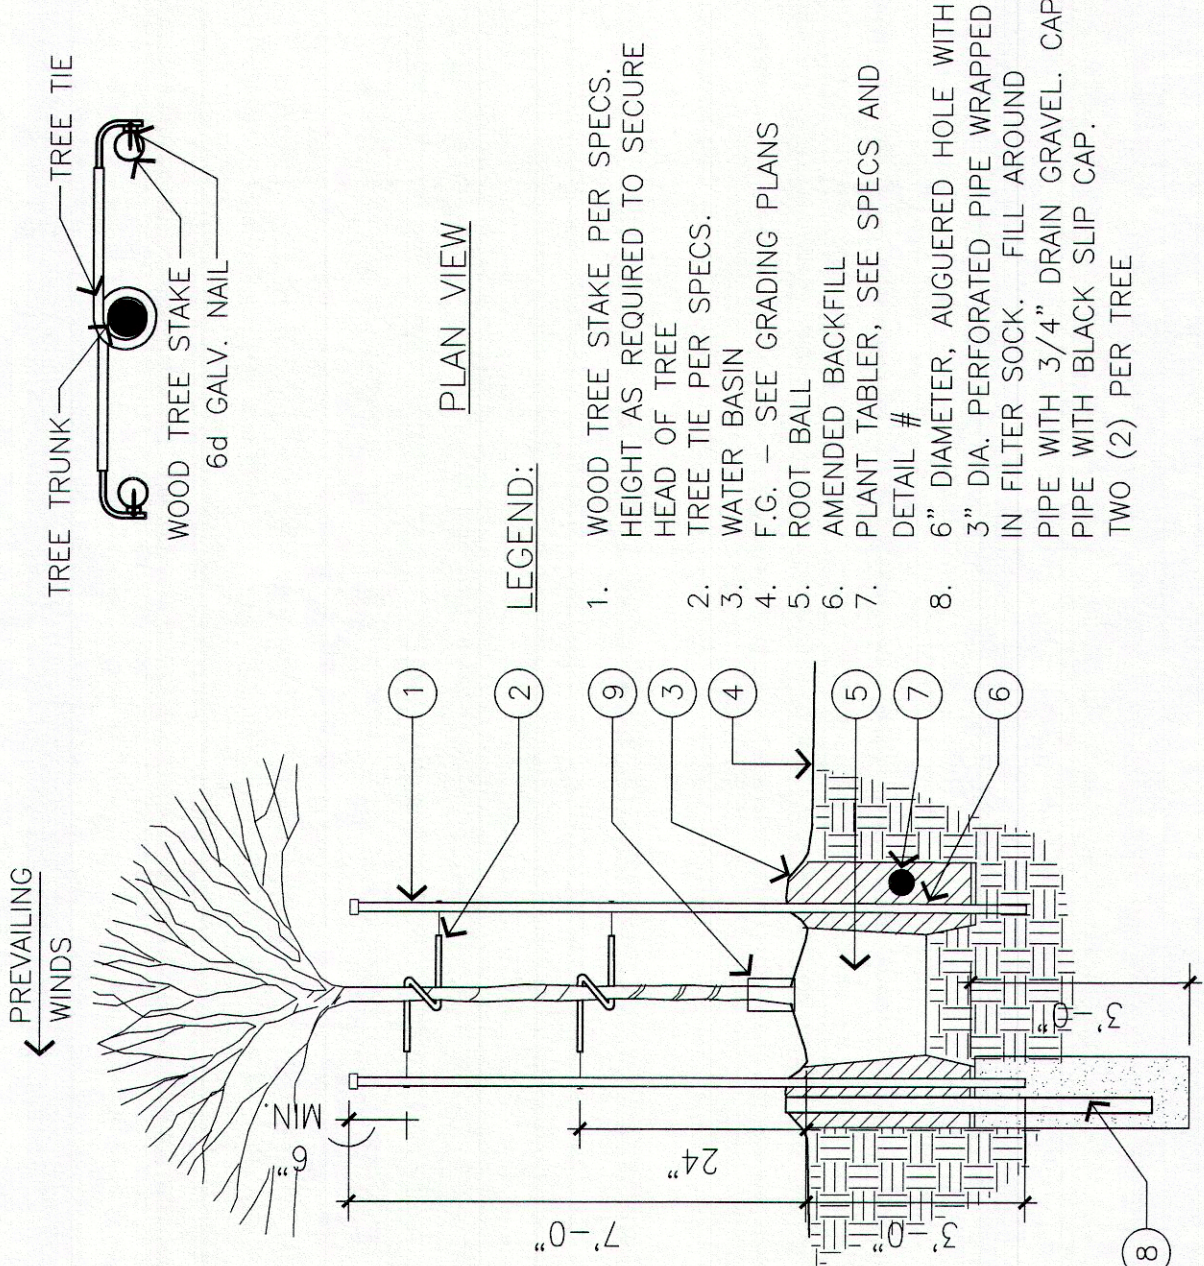


PLANTING LIST					
SYMBOL	ABBREV.	BOTANICAL NAME	COMMON NAME	SIZE	REMARKS
TREES					
	T1	QUE AGR	QUERCUS AGRIFOLIA	COAST LIVE OAK	24" BOX
3					
STANDARD					
40'-60' x 40'-50'					
SHRUBS / GROUNDCOVERS					
	S1	BAC PIL	BACCHARIS PILULARIS 'PIGEON POINT'	COYOTE BRUSH	1 GAL
	S2	COR GIG	COREOPSIS GIGANTEA	GIANT COREOPSIS	1 GAL
	S3	COR MAR	COREOPSIS MARITIMA	SEA DAHLIA	1 GAL
	S4	DES CES	DESCHAMPSIA CESPITOSA SPP. CESPITOSA	TUFTED HAIR-GRASS	1 GAL
	S5	DIP AUR	DIPLOCAUS AURANTIACUS	STICKY MONKEY FLOWER	1 GAL
	S6	EPI CAN	EPILOBIUM CANUM	CALIFORNIA FUSCHIA	1 GAL
	S7	ERI NEV	ERIOPHYLLUM NEVINII 'CANYON SILVER'	CANYON SILVER SILVERLACE	1 GAL
	S8	ESC CAL	ESCHSCHOLZIA CALIFORNICA 'MARITIMA'	CALIFORNIA POPPY	1 GAL
	S9	LIM CAL	LIMONIUM CALIFORNICUM	CALIFORNIA SEA LAVENDER	1 GAL
	S10	MUH RIG	MUHLENBERGIA RIGENS	DEER GRASS	1 GAL
	S11	ARC GLA	ARCTOSTAPHYLOS GLANDULOSA SPP. CRASSIFOLIA	DEL MAR MANZANITA	1 GAL
	S12	SAL APA	SALVIA APIANA VAR. COMPACTA	COMPACT WHITE SAGE	1 GAL
	S13	SAL CLE	SALVIA CLEVELANDII V. COMPACTA	COMPACT BLUE SAGE	1 GAL
660					
30" x 30"					

* QUANTITIES SHOWN ARE FOR BID PURPOSES ONLY. CONTRACTOR SHALL PROVIDE CORRECT QUANTITY TO COVER AREAS AS SHOWN ON THE DRAWINGS

PLANTING NOTES:

- CONTRACTOR TO REVIEW ALL UTILITY PLANS AND UTILITY LOCATIONS IN THE FIELD. AND SHALL NOTIFY LANDSCAPE ARCHITECT IF CONFLICTS WITH PLANT MATERIAL LOCATIONS EXISTS.
- IF CONFLICTS ARISE BETWEEN SIZE OF AREAS AND PLANS. CONTRACTOR TO CONTACT LANDSCAPE ARCHITECT FOR RESOLUTION. FAILURE TO MAKE SUCH CONFLICTS KNOWN WILL RESULT IN CONTRACTOR'S LIABILITY TO RELOCATE SUCH MATERIALS. CONTRACTOR TO VERIFY EXACT QUANTITIES OF PLANT MATERIAL NECESSARY BASED ON EXISTING CONDITIONS AND EXISTING PLANT MATERIAL COVERAGE.
- TREES TO BE REMOVED SHALL BE TAGGED BY CONTRACTOR AND REVIEWED BY OWNER'S AUTHORIZED REPRESENTATIVE IMMEDIATELY UPON AWARD OF GENERAL CONTRACT. CONTRACTOR SHALL SUBMIT FOR APPROVAL: PHOTOS OF SHRUBS, PLANT TAGS, AND SPECIFICATIONS (SIZE) AND QUANTITY SHALL BE NOTED. NURSERY SOURCE AND CONTACT SHALL BE NOTED.
- TREES TO REMAIN AND BE PROTECTED ARE IDENTIFIED ON THE PLANS. COORDINATE TREE PROTECTION WITH THE OWNER AS NECESSARY.
- ANY PLANT DEEMED NOT AVAILABLE BY THE CONTRACTOR SHALL BE NOTED.
- MAINTENANCE PERIOD MAY NOT BEGIN UNTIL ALL SPECIFIED MATERIALS ARE INSTALLED. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FURNISH PLANT MATERIALS FREE OF PESTS OR DISEASES. IF SELECTED OR TAGGED MATERIAL MUST BE INSPECTED BY THE CONTRACTOR IMMEDIATELY UPON AWARD OF GENERAL CONTRACT. CONTRACTOR SHALL OBLIGATION TO WARRANTY ALL PLANT MATERIALS.
- ALL PLANT MATERIAL SHALL BE APPROVED ON SITE PRIOR TO INSTALLATION. FINAL LOCATION OF ALL PLANT MATERIAL SHALL BE SUBJECT TO APPROVAL.
- ALL OVEREXCAVATION REQUIRED TO MEET PLANTING SPECIFICATIONS SHALL BE DONE PRIOR TO PAVING IF PAVING WILL CONFLICT WITH EXCAVATION OF PLANTING PITS.
- ALL GROUND COVERS SHALL BE APPLIED IN ALL PLANTING AREAS INDICATED ON PLAN AS WELL AS UNDER SHRUBS. GROUND COVERS AND MASS PLANTED SHRUBS SHALL BE TRIANGULARLY SPACED UNLESS OTHERWISE INDICATED.
- ALL PLANTING AREAS SHALL BE COVERED WITH 2"-3" DEEP ORGANIC MULCH UNLESS OTHERWISE NOTED. SUBMIT 1 CUBIC YARD SAMPLE PRIOR TO APPLICATION. AREAS STEEPER THAN 2:1 SHALL BE COVERED WITH JUTE MESH.
- MINIMUM FOUR (4) SOIL SAMPLES SHALL BE TAKEN BY CONTRACTOR AFTER GRADING OPERATIONS ARE COMPLETED FOR SOIL FERTILITY AND AGRICULTURAL SUITABILITY TESTING AND RECOMMENDATIONS. APPROVED LABORATORY IS SOIL AND PLANT LABS (714-282-8777).
- SEE SPECIFICATIONS FOR SOIL AMENDMENTS SPECIFIED FOR BIDDING PURPOSES ONLY. PROVIDE LANDSCAPE ARCHITECT WITH SOILS REPORT PRIOR TO INSTALLATION OF PLANT MATERIALS.
- THE LANDSCAPE ARCHITECT SHALL BE THE SOLE JUDGE AS TO WHEN THE MAINTENANCE PERIOD BEGINS.
- PLANT QUANTITIES AS NOTED ON THE PLANS ARE FOR THE CONVENIENCE OF THE CONTRACTOR. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ALL PLANTS AS REQUIRED TO MEET ON-CENTER SPACING AS NOTED IN THE PLANT LEGEND.




PLAN VIEW

LEGEND:

- WOOD TREE STAKE PER SPECS. HEIGHT AS REQUIRED TO SECURE HEAD OF TREE
- TREE TIE PER SPECS.
- WATER BASIN
- ROOT BALL - SEE GRADING PLANS
- AMENDED BACKFILL
- PLANT TABLER, SEE SPECS AND DETAIL #
- 6" DIA. PERFORATED PIPE WRAPPED IN FILTER SOCK. FILL AROUND PIPE WITH BLACK SLIP CAP. TWO (2) PER TREE

1 TREE PLANTING AND STAKING


N.T.S.

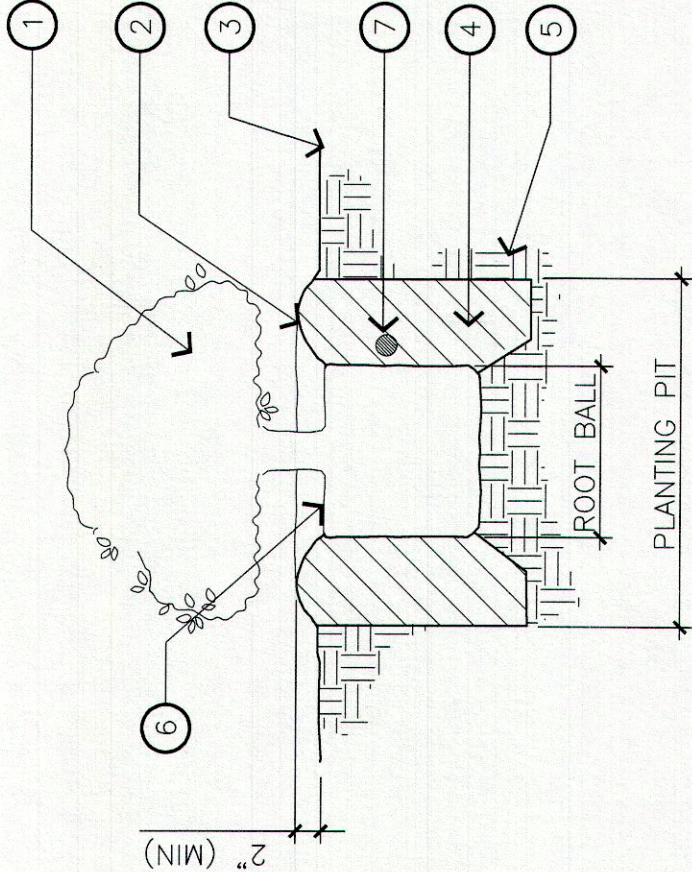

- LEGEND
- CONTAINER PLANT
 - WATER BASIN
 - FINISH GRADE
 - AMENDED BACKFILL
 - EXISTING SOIL
 - MULCH
 - PLANT TABLER

2 SHRUB PLANTING

N.T.S.

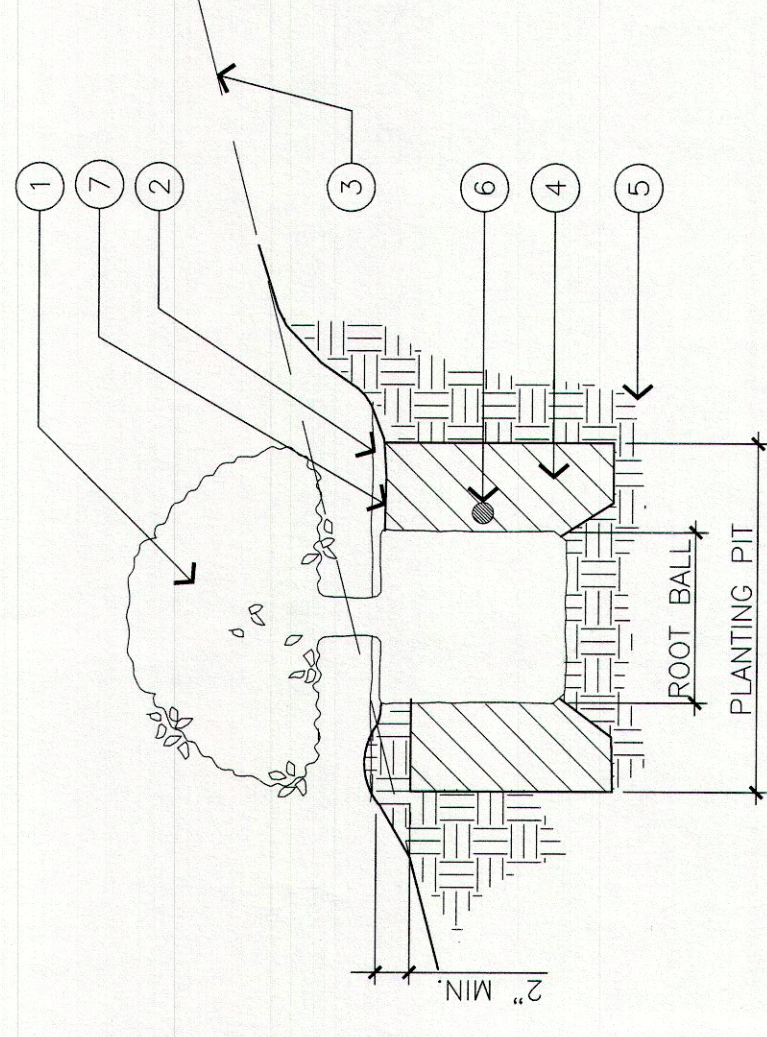


- LEGEND
- CONTAINER PLANT
 - WATER BASIN, COMPACT AS REQ'D. TO HOLD WATER
 - F.G.
 - AMENDED BACKFILL
 - EX. SOIL
 - PLANT TAB.
 - MULCH

5 PLANT TABS

N.T.S.

3 SHRUB PLANTING ON SLOPE

N.T.S.

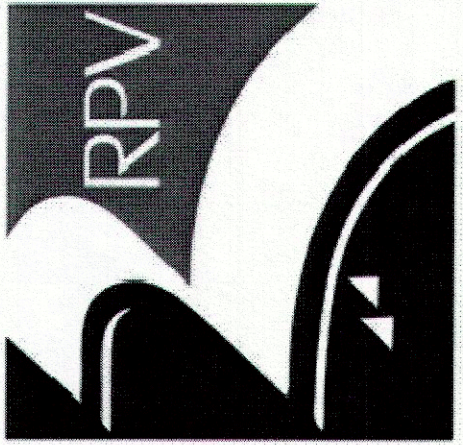

REVISIONS:

NO. DATE ITEM


ABALONE COVE SHORELINE PARK IMPROVEMENTS

PLANTING LEGEND, NOTES AND DETAILS

PROJECT: SHEET TITLE:

MELÉNDREZ
LANDSCAPE ARCHITECT
877 South Orange Street, 11th Floor
Los Angeles, California 90014
714-293-4410
www.melandrez.com

REGISTRATION:



PROJECT NO: 1305101.00

SUBMITAL DATE: 10/11/2013

PHASE: BID SET

DESIGNED BY: AH

DRAWN BY: JM / TA

PLAN NO:

L-7

SHEET NO: 15 OF 17