

- NOTES:**
1. ALL STROKES TO BE 3" WIDE
 2. PROVIDE 2 COATS OF PAINT.
 3. SYMBOL COLOR TO BE WHITE ON A BLUE BACKGROUND.
 4. LOCATE SYMBOL AT CENTER OF STALL WHERE SHOWN ON SITE PLAN.

ADDITIONAL ACCESSIBILITY SIGNAGE REQUIREMENTS:

EACH PARKING SPACE RESERVED FOR THE HANDICAPPED, AS SHOWN PER THE SITE PLAN, SHALL BE IDENTIFIED BY A PERMANENTLY AFFIXED REFLECTORIZED SIGN CONSTRUCTED OF PORCELAIN ON STEEL BEADED TEXT, OR EQUAL, DISPLAYING THE INTERNATIONAL SYMBOL OF ACCESSIBILITY. THE SIGN SHALL NOT BE SMALLER THAN 10 SQUARE INCHES IN AREA AND SHALL BE CENTERED AT THE INTERIOR END OF THE PARKING STALL AT A MINIMUM HEIGHT OF 80 IN. FROM THE BOTTOM OF THE SIGN TO THE PARKING SPACE FINISHED GRADE.

A SIGN SHALL ALSO BE POSTED, IN A CONSPICUOUS PLACE, AT EACH ENTRANCE TO THE OFF-STREET PARKING FACILITY, NOT LESS THAN 10" X 22" IN SIZE WITH LETTERING NOT LESS THAN 1/2" IN HEIGHT, WHICH CLEARLY AND CONSPICUOUSLY STATES THE FOLLOWING:

"UNAUTHORIZED VEHICLES NOT DISPLAYING DISTRINGUISHED PLACARDS OR LICENSE PLATES ISSUED FOR PHYSICALLY HANDICAPPED PERSONS MAY BE TOWED AWAY AT OWNER'S EXPENSE. TOWED VEHICLES MAY BE RECLAIMED AT _____ OR BY TELEPHONING _____"

DISPOSITION NOTES:

1. PROTECT IN PLACE.
2. SAWCUT AND REMOVE EXISTING PAVEMENT.
3. REMOVE EXISTING HOOD BOLLARDS.
4. REMOVE EXISTING A.C. SIDEWALK.
5. REMOVE EXISTING TREE.
6. REMOVE EXISTING P.C.C. CURB.
7. REMOVE EXISTING P.C.C. SIDEWALK.
8. REMOVE EXISTING WALL.

CONSTRUCTION NOTES:

1. CONSTRUCT 1" A.C. OVER COMPACTED NATIVE.
2. CONSTRUCT 6" P.C.C. CURB TYPE A14, PER ALPHA STD. 120-1.
3. CONSTRUCT 4" P.C.C. SIDEWALK PER ALPHA STD. 115-1.
4. CONSTRUCT 4" A.C. PATH.
5. CONSTRUCT WALL PER DETAIL 12 ON SHEET H-4.
6. CONSTRUCT TERRACE PAVING PER DETAIL 31 ON SHEET H-4.
7. CONSTRUCT 6" ADS N-12 PIPE INCLUDING ALL FITTINGS.
8. CONSTRUCT DRAIN INLET PER DETAIL 21 ON SHEET H-4.
9. CONSTRUCT DRAIN INLET PER DETAIL 20 ON SHEET H-4.
10. CONSTRUCT 12" ADS N-12 PIPE INCLUDING ALL FITTINGS.
11. CONSTRUCT 8" DRAIN BASIN W/ 6" DOMED GRATE PER ADS STDS AND PER DETAIL HEREON.
12. CONSTRUCT 10" DRAIN BASIN W/ 10" X 10" SQUARE GRATE PER ADS STDS.
13. CONSTRUCT 6" DECOMPOSED GRANITE.
14. CONSTRUCT 1" A.C. OVERLAY.
15. CONSTRUCT SIDEWALK ACCESS RAMP PER ALPHA STD. III-2, CASE B, TYPE I, SECTION B.8, DETAIL 12, MODIFIED (RAMP ONLY TO WEST).
16. INSTALL 12" X 6" ADS N-12 NYE, PART NO. 120-AN.
17. SAWCUT, REMOVE AND REPLACE WITH 1" A.C. PAVEMENT OVER COMPACTED NATIVE.
18. CONSTRUCT TRASH ENCLOSURE PER DETAIL ON SHEET C-2.
19. CONSTRUCT 6" A.C. CURB.
20. CONSTRUCT 4" WHITE PAVEMENT STRIPING FOR PARKING STALLS.
21. REPLACE EXISTING PAVEMENT STRIPING IN KIND.

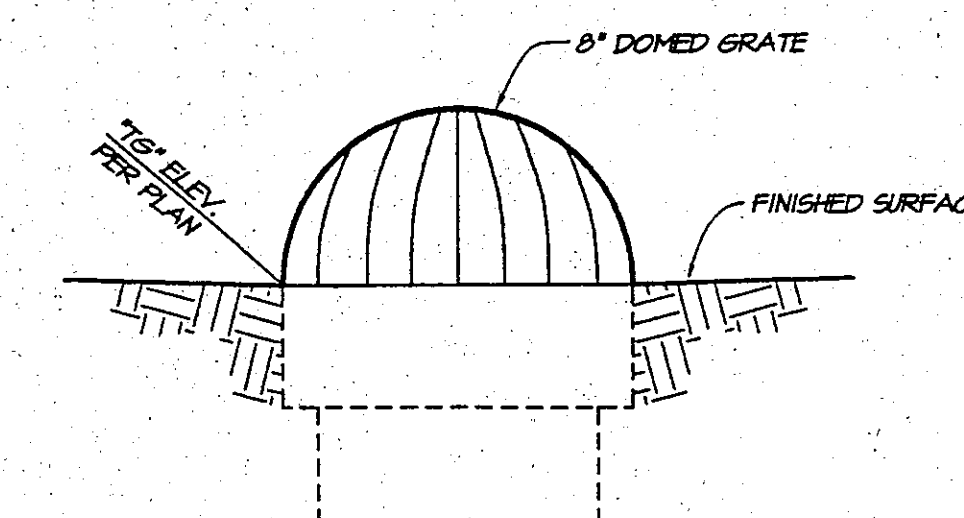


TABLE OF COURSES AND CURVE DATA

ID	BEARING/DELTA	RADIUS	LENGTH
1	135°54'38"E	-	21.03'

EARTHWORK (CY)

	CUT	FILL	NET
BUILDING PAD	10	1080	1070
SITE GRADINGS	275	275	0

PREPARED UNDER THE SUPERVISION OF:
Robert M. M... PE, 00000
MERIT CIVIL ENGINEERING, INC.
MUNICIPAL ENGINEERING SERVICES
2100 N. Orangewood Ave., Suite 110, Orange, CA 92668 (714) 935-0238

24,645 = 158 lbs
3910 = 171 lbs
ASPMAT
SF X 2 X 0.0625
Tons

REGISTERED PROFESSIONAL ENGINEER - CIVIL
NO. 00000
EXP. 1-1-16
STATE OF CALIFORNIA

JIM VICENTE INTERPRETIVE CENTER EXPANSION
11501 Pabos Verdes Drive West
Rancho Pabos Verdes, CA